

## SIEMENS

### Data sheet

### 3RB2046-2EB0

Overload relay 25...100 A For motor protection Size S3, Class 20  
 Contactor mounting Main circuit: Screw terminal Auxiliary circuit:  
 Screw terminal Manual-Automatic-Reset !!! Phased-out product !!!  
 Successor is SIRIUS 3RB3 Preferred successor type is >>3RB3046-  
 2XB0<<



Figure similar

<b>Product brand name</b>	SIRIUS
<b>Product designation</b>	solid-state overload relay
<b>General technical data</b>	
<b>Size of contactor can be combined company-specific</b>	S3
<b>Power loss [W] total typical</b>	0.05 W
<b>Insulation voltage</b>	1 000 V
• with degree of pollution 3 rated value	
<b>Surge voltage resistance rated value</b>	8 kV
<b>Protection class IP</b>	IP00
• on the front	
<b>Shock resistance</b>	15g / 11 ms
<b>Type of protection</b>	PTB 06 ATEX 3001 Ex II (2) GD
<b>Reference code acc. to DIN EN 81346-2</b>	F
<b>Ambient conditions</b>	
<b>Installation altitude at height above sea level</b>	2 000 m
• maximum	
<b>Ambient temperature</b>	

<ul style="list-style-type: none"> <li>during operation</li> </ul>	-25 ... +60 °C
<ul style="list-style-type: none"> <li>during storage</li> </ul>	-40 ... +80 °C
<ul style="list-style-type: none"> <li>during transport</li> </ul>	-40 ... +80 °C
Relative humidity during operation	100 %

### Main circuit

<b>Number of poles for main current circuit</b>	3
<b>Adjustable pick-up value current of the current-dependent overload release</b>	25 ... 100 A
<b>Operating voltage</b>	
<ul style="list-style-type: none"> <li>at AC-3 rated value maximum</li> </ul>	1 000 V

### Auxiliary circuit

<b>Number of NC contacts for auxiliary contacts</b>	1
<b>Number of NO contacts for auxiliary contacts</b>	1
<b>Number of CO contacts</b>	
<ul style="list-style-type: none"> <li>for auxiliary contacts</li> </ul>	0
<b>Operating current of auxiliary contacts at AC-15</b>	
<ul style="list-style-type: none"> <li>at 24 V</li> <li>at 110 V</li> <li>at 120 V</li> <li>at 125 V</li> <li>at 230 V</li> </ul>	4 A 4 A 4 A 4 A 3 A
<b>Operating current of auxiliary contacts at DC-13</b>	
<ul style="list-style-type: none"> <li>at 24 V</li> <li>at 60 V</li> <li>at 110 V</li> <li>at 125 V</li> <li>at 220 V</li> </ul>	2 A 0.55 A 0.3 A 0.3 A 0.11 A

### Protective and monitoring functions

<b>Trip class</b>	CLASS 20E
-------------------	-----------

### Short-circuit protection

<b>Design of the fuse link</b>	
<ul style="list-style-type: none"> <li>for short-circuit protection of the auxiliary switch required</li> </ul>	fuse gL/gG: 6 A

### Installation/ mounting/ dimensions

<b>Mounting position</b>	any
<b>Mounting type</b>	direct mounting
<b>Height</b>	106 mm
<b>Width</b>	70 mm
<b>Depth</b>	124 mm
<b>Required spacing</b>	
<ul style="list-style-type: none"> <li>with side-by-side mounting</li> </ul>	

— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	0 mm
• for grounded parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— at the side	6 mm
— downwards	0 mm
• for live parts	
— forwards	0 mm
— Backwards	0 mm
— upwards	0 mm
— downwards	0 mm
— at the side	6 mm

## Connections/Terminals

<b>Product function</b>	
• removable terminal for auxiliary and control circuit	Yes
<b>Type of electrical connection</b>	
• for main current circuit	screw-type terminals
• for auxiliary and control current circuit	screw-type terminals
<b>Type of connectable conductor cross-sections</b>	
• for main contacts	
— solid	2x (2.5 ... 16 mm <sup>2</sup> )
— stranded	2x (10 ... 50 mm <sup>2</sup> ), 10 ... 70 mm <sup>2</sup>
— finely stranded with core end processing	2x (2.5 ... 35 mm <sup>2</sup> ), 2.5 ... 50 mm <sup>2</sup>
• at AWG conductors for main contacts	2x (10 ... 1/0), 1x (10 ... 2/0)
<b>Type of connectable conductor cross-sections</b>	
• for auxiliary contacts	
— solid	0.5 ... 4 mm <sup>2</sup> , 2x (0.5 ... 2.5 mm <sup>2</sup> )
— finely stranded with core end processing	0.5 ... 2.5 mm <sup>2</sup> , 2x (0.5 ... 1.5 mm <sup>2</sup> )
• at AWG conductors for auxiliary contacts	2x (20 ... 14)

## Electromagnetic compatibility

<b>Conducted interference</b>	
• due to burst acc. to IEC 61000-4-4	2 kV (power ports), 1 kV (signal ports) corresponds to degree of severity 3
• due to conductor-earth surge acc. to IEC 61000-4-5	2 kV (line to earth) corresponds to degree of severity 3

- due to conductor-conductor surge acc. to IEC 61000-4-5

1 kV (line to line) corresponds to degree of severity 3

Field-bound parasitic coupling acc. to IEC 61000-4-3

10 V/m

Electrostatic discharge acc. to IEC 61000-4-2

6 kV contact discharge / 8 kV air discharge

## Certificates/approvals

General Product Approval	EMC	For use in hazardous locations
--------------------------	-----	--------------------------------



Declaration of Conformity	Test Certificates	Marine / Shipping
---------------------------	-------------------	-------------------



[Special Test Certificate](#)

[Type Test Certificates/Test Report](#)



Marine / Shipping	other
-------------------	-------



[Miscellaneous](#)

[Confirmation](#)

## Further information

**Information- and Downloadcenter (Catalogs, Brochures,...)**

<http://www.siemens.com/industrial-controls/catalogs>

**Industry Mall (Online ordering system)**

<https://mall.industry.siemens.com/mall/en/en/Catalog/product?mlfb=3RB2046-2EB0>

**Cax online generator**

<http://support.automation.siemens.com/WW/CAXorder/default.aspx?lang=en&mlfb=3RB2046-2EB0>

**Service&Support (Manuals, Certificates, Characteristics, FAQs,...)**

<https://support.industry.siemens.com/cs/ww/en/ps/3RB2046-2EB0>

**Image database (product images, 2D dimension drawings, 3D models, device circuit diagrams, EPLAN macros, ...)**


[http://www.automation.siemens.com/bilddb/cax\\_de.aspx?mlfb=3RB2046-2EB0&lang=en](http://www.automation.siemens.com/bilddb/cax_de.aspx?mlfb=3RB2046-2EB0&lang=en)

**Characteristic: Tripping characteristics, I<sup>2</sup>t, Let-through current**


<https://support.industry.siemens.com/cs/ww/en/ps/3RB2046-2EB0/char>

**Further characteristics (e.g. electrical endurance, switching frequency)**

<http://www.automation.siemens.com/bilddb/index.aspx?view=Search&mlfb=3RB2046-2EB0&objecttype=14&gridview=view1>

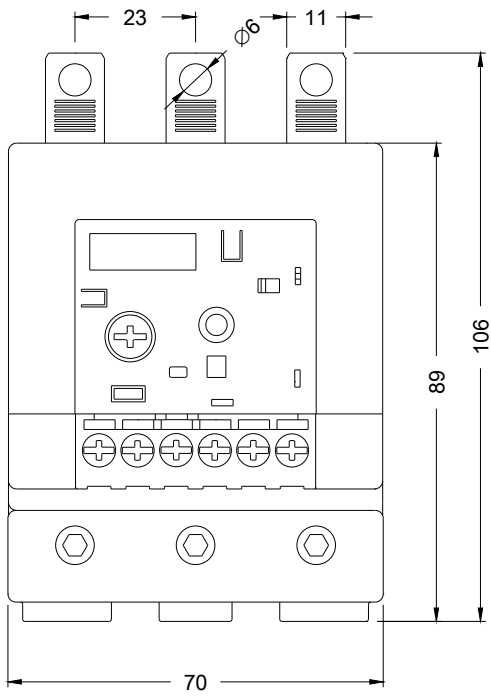

last modified:

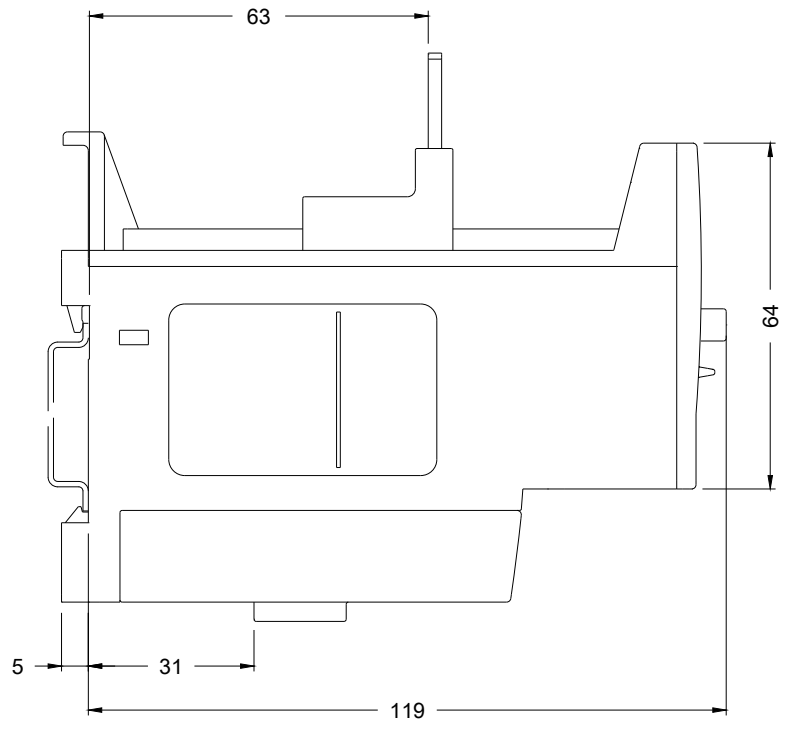

07/20/2018